

Solid Sawn® Flooring by Vintage




SOLID SAWN

Vintage's revolutionary Solid Sawn Hardwood floors offer both stability and beauty in a variety of species and a wide selection of distinctive colors and widths. Provided that a relative humidity level of 25-70% is maintained, we guarantee that our Solid Sawn floors will not cup, crown or produce gaps in the colder months of the year.

HICKORY



NATURAL



OLD MISSION



CHIVAS




WINCHESTER




THAMES



MOOREA



NILE




MESQUITE


WHITE OAK



NATURAL



ORACLE




EXCALIBUR



ORION




EDINBOROUGH




GABON




BUCKINGHAM



OLD OAK



BAROQUE



GOTHAM



BLACK OAK

JATOBBA RIFT & QUARTER SAWN



NATURAL



RENAISSANCE



VENETIAN BROWN

TIGERWOOD



NATURAL

SOLID SAWN® SPECIFICATIONS



SOLID SAWN

Product Type:

Structured Solid Sawn

Product Species:

Hickory, White Oak, Tigerwood, Jatoba Rift & Qtr. Sawn

Product Width:

Availability of widths will vary by grade and color. Refer to availability chart for more information.

Product Lengths:

Domestic Species:

Character: 18" – 84" Average 42"

Select-V Rift & Quarter Sawn White Oak: 14" -72" Average 38"

Exotic Species:

Estate: 18" – 71" Average 38"

Product Gloss:

Pearl is Standard on all Exotics & Character grade Hickory & White Oak
UV Oil is Standard on some White Oak. Refer to Availability chart.
Available by special order on all other products and species

Product Grade:

Availability of grades will vary by species and widths. Refer to availability chart for more information.

Product Construction:

3 ply, Solid Sawn

Product Thickness:

5mm for domestic species, 4.2mm for exotic species

Core Layer:

9mm Solid Finger Core – Similar or alike species

Back Layer:

4.5mm Solid Finger Core – Similar or alike species
Aluminum Oxide (Armour-Kote®) Top Coat

Installation Method

Nail onto plywood, Glue or Float on concrete on, at or below grade

Radiant Heat:

Contact a Vintage dealer for approved species over radiant heat

Structural Warranty:

Lifetime

Lifetime Stability Warranty:

Relative humidity must be maintained between 25% – 70%


Residential Warranty:

25-Year Wear Warranty


Commercial Warranty:

3-Year Limited Warranty

Relative Humidity Stability Chart

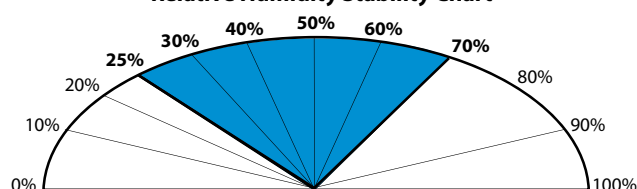

3/4" (19mm) Solid Sawn 25-70%



*Not all species are warranted over radiant heat. Consult your dealer for further information.



VINTAGE HARDWOOD FLOORING

409 Evans Ave. Toronto,
Ontario M8Z 1K8

Tel: (416) 252-0962

Toll Free: 1-877-256-0231

www.vintageflooring.com