



Hand Scraped hardwood has a distinct look and old world feel that goes back hundreds of years. Each board of Vintage Hand scraped hardwood flooring is unique, scraped and crafted by hand then stamped on the back by the craftsman. Hand scraped floors tend to require less maintenance than smooth finish floors and help hide everyday wear. They are contoured to accentuate the natural beauty and character of each species.

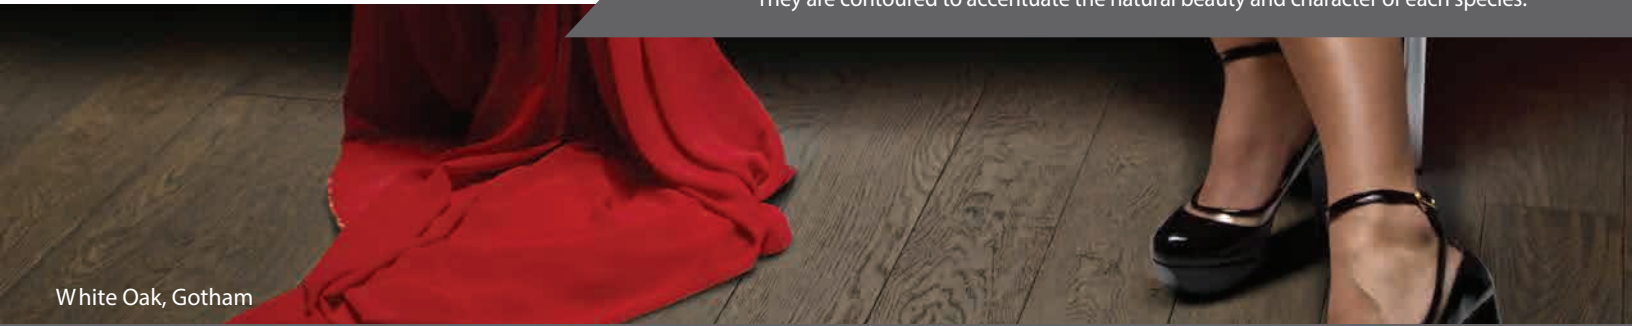

White Oak, Gotham


**HICKORY**

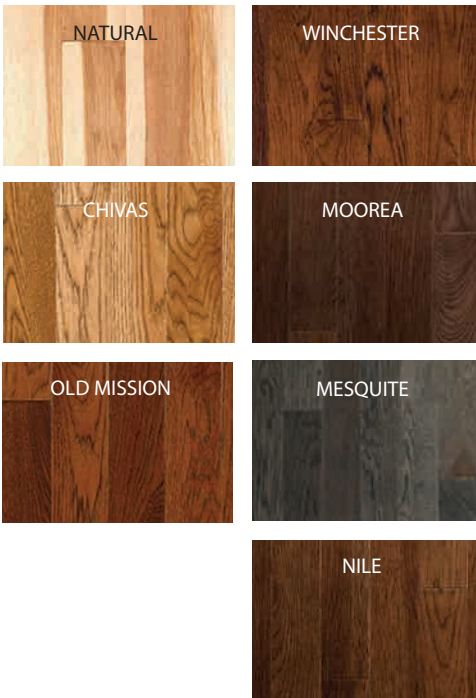

**MAPLE**



**WHITE OAK**


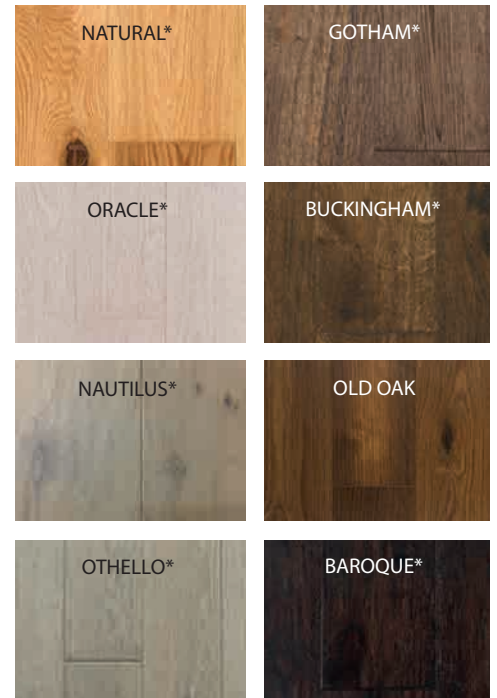


\* Herringbone: These species and colors are available in Herringbone. Refer to the Herringbone specification sheet for more information.




# HAND SCRAPED SPECIFICATIONS

Product Type:	3/4" (19mm) Structured Solid Sawn® Authentic Hand Scraped
Product Species:	Hickory, Maple, White Oak
Product Grades & Width:	Hickory Character: 5" (127mm), 7" (177 mm) Maple Character: 5" (127 mm) White Oak Character 5" (127 mm), 7" (177 mm), 10" (254 mm) Herringbone White Oak Character: 5" (127 mm) x 30" (762 mm)
Availability of widths will vary by grade and color. Refer to availability chart for more information.	
Product Lengths:	Character 5", 7": 16" – 84" Average 44" (406 mm-2134 mm Ave. 1118 mm) Character 10": 24" – 114" Average 58" (609 mm- 2896 mm Ave. 1473 mm)
Product Gloss:	Pearl and UV Urethane Oil
Product Grade:	Character with filled voids
Product Construction:	3/4" (19mm) 3 Layer, Solid Sawn
Face Lamella:	4mm Solid Species
Core Layer:	10mm Solid Finger construction of same species or alike species
Back Layer:	5mm Solid Sawn construction of same species or alike species
Installation Method:	Nail, Glue or Float Herringbone Glue
Radiant Heat:	See Radiant Heat Warranty
Structural Warranty:	Lifetime
Lifetime Stability Warranty:	Relative humidity must be maintained between 25% – 70%
Residential Warranty:	25-Year Wear Warranty for Pearl 10-Year Wear Warranty for UV Urethane Oil
Commercial Warranty:	3-Year Wear Warranty for Pearl 1-Year Wear Warranty for UV Urethane Oil

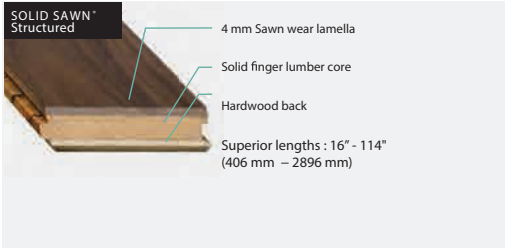

Consult Vintage's radiant heat compliance information available at [www.vintageflooring.com](http://www.vintageflooring.com)

Relative Humidity Chart



3/4" (19 mm) Structured

