




Herringbone is a classic geometrical pattern made from individual strips of hardwood and installed to create the typical V pattern. Some sizes can also be installed in a cube, fence, brick or basket patterns.

SMOOTH			WIRE BRUSHED		
RED OAK		WHITE OAK	RED OAK		
TITANIUM	OPHELIA	ORACLE	OASIS	TITAN	DOVER
OASIS	CHARIOT	ATHENA	ANGORA	OPHELIA	CHARIOT
ANGORA	DOVER	NAUTILUS	NATURAL	ZAMBEZI	BERKSHIRE
ВАЈА	BERKSHIRE	NATURAL	KAHLUA	GRYPHON	COCOA
NATURAL	COCOA	BAUHAUS		PEWTER	
KAHLUA	GRYPHON	GABON		WHITE OAK	
МОСНА	PEWTER	APOLLO	ATLANTIS	PHAROAH	BUCKINGHAM
		BUCKINGHAM	NAUTILUS	ZEUS	BAROQUE
		GOTHAM	ORION	GOTHAM	
		BAROQUE			



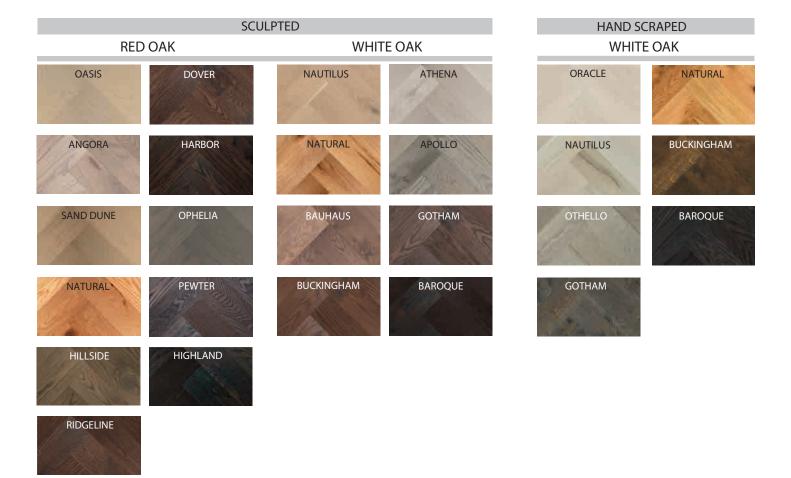

HERRINGBONE SPECIFICATIONS

Product Type: 3/4" (19 mm) Northern Solid Sawn® Structured

3/4" (19 mm) Solid Sawn® Structured

Product Species & Smooth: Red Oak: Natural, Angora, Baja, Berkshire, Chariot, Cocoa,

Dover, Gryphon, Kahlua, Mocha, Oasis, Ophelia,

Pewter, Titanium

White Oak: Natural, Apollo, Athena, Baroque, Bauhaus,

Buckingham, Gabon, Gotham, Nautilus, Oracle

Wire Brushed: Red Oak: Natural Angora, Berkshire, Chariot, Cocoa,

Dover, Gryphon, Kahlua, Oasis, Ophelia, Pewter,

Titan, Zambezi

White Oak: Atlantis, Baroque, Buckingham, Gotham,

Nautilus, Orion, Pharaoh, Zeus

Hand Scraped: White Oak: Natural, Baroque, Buckingham, Gotham,

Nautilus, Oracle, Othello

Product Dimensions: Smooth: Red Oak and White Oak: Northern Solid Sawn®

Select-V 3 1/4" x 14.68", 5" x 30"

Wire Brushed: Red Oak and White Oak: Northern Solid Sawn®

Select-V 3 1/4" x 14.68", 5" x 30"

Hand Scraped: White Oak Solid Sawn® Character 5" x 30"

Product Gloss: Smooth: Red Oak: Pearl

White Oak: Pearl or UV Urethane Oil*

Wire Brushed: Red Oak: UVF or UV Urethane Oil*

White Oak: UV Urethane Oil

Hand Scraped: White Oak: Pearl or UV Urethane Oil*

*Refer to availability chart for details

Product Construction: Tongue and groove, microbevel on 4 sidees. Hand Scraped has pillowed

bevel.

Installation Method: Glue

Colors

Radiant Heat: Yes - see Radiant heat warranty

Structural Warranty: Lifetime

Warranty:

Lifetime Stability Relative Humidity must be maintained between 25 - 70%

for Solid Sawn® and Northern Solid Sawn®

Residential Warranty: 25-year wear warranty for Pearl and UVF

10-year wear warranty for UV Urethane Oil


Commercial Warranty: 3-year wear warranty for Pearl and UVF

1-year wear warranty for UV Urethane Oil






Relative Humidity Chart







Consult Vintage's radiant heat compliance information available at www.vintageflooring.com







